



## Brass Cable Glands CX Type

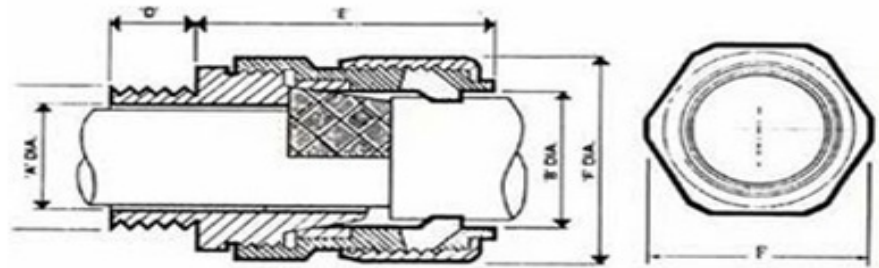

**BRASS CX TYPE CABLE GLANDS**

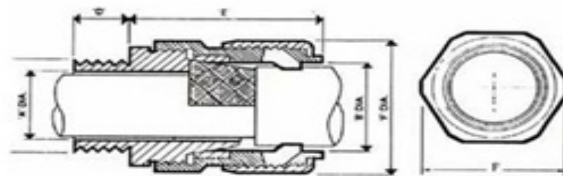

## Brass Cable Glands CX Type

Metric thread entry size MM	Dimensions			Braidthickness maximum MM	Equivalent imperial thread size inches	Minimum entry thread length 'D' MM	Assembled length excl. thread entry 'E' MM Appx. (maximum)	Brass lock nuts A/F in mm	Hexagon Size 'F' on gland body MM (A/F)
	Bore 'A'		Cable 'B'						
	MM	MIN MM	MAX MM						
20S	11.7	11.2	16.0	0.85	3/4	10.0	44	24	23
32	26.3	26.4	34.0	1.25	1 1/4	10.0	51.5	36	41
40	32.2	31.5	40.5	1.4	1 1/2	15.0	55	46	50
20 / 16	8.7	8.0	13.5	0.85	3/4	10.0	41	22	23
25	20.0	15.5	24.0	0.9	1	10.0	51	30	33
20	14.0	13.2	21.0	0.85	3/4	10.0	46	24	26
50S	38.2	36.4	46.8	1.4	2	15.0	54.5	55	61
50	44.1	42.9	52.8	1.4	2	15.0	70	55	63
75S	62.0	60.0	71.8	1.5	3	15.0	96	80	100
63S	50.0	46.8	60.5	1.5	2 1/2	15.0	80	70	84
75	68.0	66.7	78.1	1.5	3.	15.0	96	80	100
63	56.0	58.4	65.5	1.5	2 1/2	15.0	80	70	85

S denotes small cable entry size

<b>Cable Type:</b>	Wire Braid or Steel Tape Armour
--------------------	---------------------------------

<b>Finish And Coating :</b>	Natural, Nickel Plated, Tin Plated or any coating as per customer specification.
<b>Threads :</b>	ISO Metric (MM Threads).
<b>Standard:</b>	BS6121 Part 1
<b>Armour Clamping:</b>	Three part armour lock
<b>Sealing :</b>	TPE (Thermoplastic Elastomer)
<b>Material:</b>	Free Cutting Brass IS 319 type (i) or Free Cutting Brass as per BS 249 CZ 121 CDA 360 grade Brass type (i) or High Grade Free Cutting Brass or Any special Brass Material Composition as per customers requirement

Any kind of special Brass Cable Glands can be developed and supplied exactly as per customer specifications.

**ADDEESS:**

**A1metallics INDIA** Plot- 1255, GIDC Industrial Estate, Shanker tekri Jamngar 361004 Gujarat INDIA

**CONTACTS:**

PHONE : 91-22-43449300/99

FAX : 91-22-22834046

EMAIL : [sales@a1metallics.com](mailto:sales@a1metallics.com)

**[CONTACT US](#) | [BACK TO HOME PAGE](#)**

**KEYWORDS:**