


Cable Glands CXT Brass CXT Glands

Cable Glands CXT Brass CXT Glands

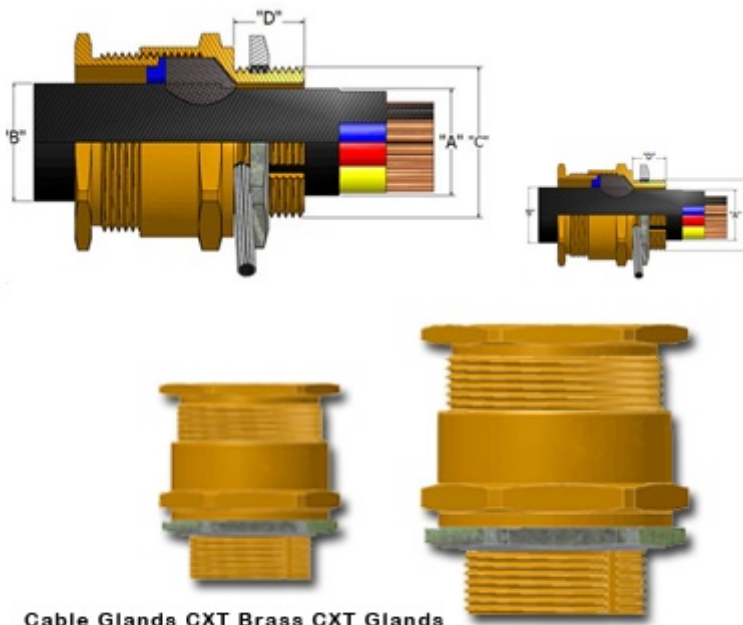

Cable Glands CXT Brass CXT Glands

Brass Cable Glands CXT Type

Size	Thread size "C"			Thread Length "D"	Cable Dimension		A/F	A/C	Product Code
	Metric	BSP	NPT		A Min	B Max			
CXT-16	16	5/8"	1/2"	15.00	3.10	8.60	21.00	23.00	ACXT-16
CXT-25	25	1"	3/4"	15.00	11.10	19.90	36.00	39.75	ACXT -25
CXT-20S	20	3/4"	1/2"	15.00	6.10	11.60	24.00	26.50	ACXT -20S
CXT-32	32	1 1/4"	1"	15.00	17.00	26.15	41.00	46.00	ACXT -32
CXT-20	20	3/4"	1/2"	15.00	6.50	13.90	27.00	30.00	ACXT -20
CXT-50S	50	2"	1 1/2"	15.00	29.80	38.10	54.75	61.30	ACXT -50S
CXT-50	50	2"	1 1/2"	15.00	36.90	43.30	60.00	66.50	ACXT -50
CXT-63S	63	2 1/2"	2"	15.00	42.20	49.90	70.25	77.50	ACXT -63S
CXT-63	63	2 1/2"	2"	15.00	48.30	54.90	74.75	83.00	ACXT -63
CXT-90	90	3 1/2"	3"	15.00	66.60	79.30	107.00	119.70	ACXT -90
CXT-75S	75	3"	2 1/2"	15.00	54.20	62.00	80.00	89.00	ACXT -75S
CXT-75	75	3"	2 1/2"	15.00	59.80	66.90	84.00	94.00	ACXT -75

Brass cable glands CXT type are suitable for use with all types of screened flexible wire braid/wire braid armour cables. The CXT glands and cable gland packs cable glands provide mechanical cable retention and electrical continuity.

Application:	For indoor and outdoor cable gland for use with all types of Shielded Flex (SY) and Screened Flexible Cable (CY) to Unscreened or Unshielded Control Cable (YY).
Thread:	BSP & NPT
Size:	16mm to 90mm & 3/4" to 3½"
Standard:	BS 6121 - 1 - 2005
Ingress:	IP66
Protection Material:	Brass BS 2874, Nickle Plated Brass
Accessories:	-20° C to + 80° C
Operating Temp.:	-20° C to + 80° C
Function:	providing environmental seal on outer sheaths of the unarmored Cable.

ADDEESS:

A1metallics INDIA Plot- 1255, GIDC Industrial Estate, Shanker tekri Jamnagar 361004 Gujarat INDIA

CONTACTS:

PHONE : 91-22-43449300/99

FAX : 91-22-22834046

EMAIL : sales@a1metallics.com

[CONTACT US](#) | [BACK TO HOME PAGE](#)

KEYWORDS: